


**Driven by Customers ... Powered by Proven Products** 

# The Smart Conveyor™



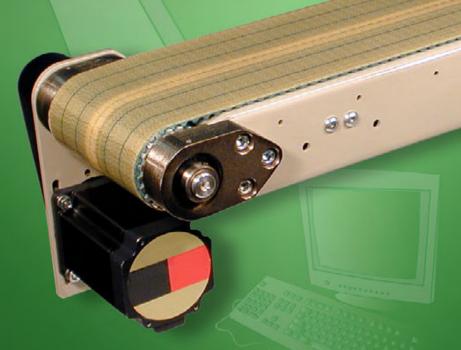

The Smart Conveyor



## The Smart

### Precision Indexing

High Speeds

PRECISION INDEXING tolerance to register a part to within +/-.015" without sensors

HIGH SPEEDS up to 2000 fpm with ramp up/down capacity

#### **SPECIFICATIONS**

Widths up to 18 inches (Special widths available. Consult factory.)

Lengths up to 24 feet

Rapid adjust guides, conveyor mounts and support stands available as standard

Heavy duty 10 gauge steel powder coated frame construction

Custom powder coated colors to match customer specifications

Less than 5-minute belt change outs

Available in standard, washdown and metric versions



#### **TIMING PULLEYS**

Positive non-slip drive pulleys

Self-aligning drive bearing with seals

Bearings can be lubricated rapidly, without drive removal

Pulleys comprised of 22 T10 pitch teeth

Tooth-to-tooth dimension is 10mm

One revolution of the belt equals 220mm of travel

#### **TIMING APPLICATIONS**

**Precision indexing** 

High cycle start/stop

Synchronous movement

Rapid cycling

Reversing

Elevating

Side exiting

# Conveyor™



### Custom Cleats

STEPPER MOTORS
and SERVO DRIVES

**PLC** programmable

Multiple drive mounting configurations available



CUSTOM MOLDED CLEATS to integrate perfectly with your part or application
























#### TIMING BELTS

Self-tracking V-guide thermally welded to the carcass of the belt

Nylon coated belt carcass to reduce friction and minimize noise


Positive non-slip timing belt carcass

Ability to run multiple bands of belting on one conveyor

Timing belts are steel or Kevlar reinforced to offer high load carrying capacities, reduce stretch and allow for precision cleat or profile placement



### The Smart Conveyor™

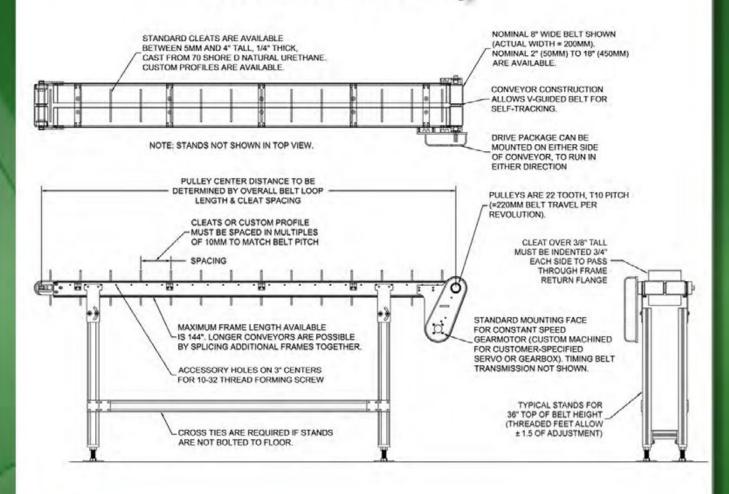



4057 Clough Woods Drive Batavia OH 45103 513-753-6000 Fax 513-753-6001 E-mail: sales@qcindustries.com

www.qcindustries.com

Distributor: